


FL958K Wheel Loader Specifications

LOVOL

FL958K Dimensions

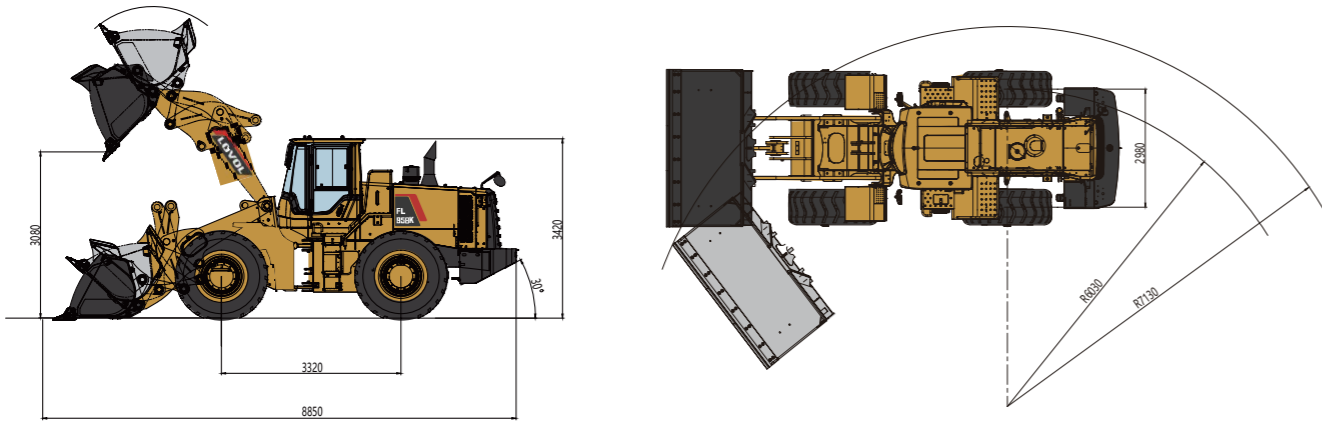

Item	Specifications
Rated Load	5500kg
Max. Traction Force	165kN
Max. Gradeability	30°
Max. Dump Clearance	3080mm
Dump Reach	1130mm
Wheel Tread	2150mm
Wheelbase	3320mm
Overall Dimension (L×W×H)	8850mm×2980mm×3420mm

Engine	
Emission Standard	Stage III
Number of Cylinder	6
Max. Torque	1187N·m
Rated Speed	2200rpm
Displacement	9.3L

Transmission System	
Torque Converter	/
Modulus of Converter	4±0.2
Transmission	Full-automatic shift planetary style
Gear Shift	2 forward, 1 reverse
Max. Speed	42km/h

Front and Rear Axles	
Axles Type	Dry

Tyre	
Tyre Size	23.5-25
Ply	Front 18, rear 16
Front Tyre Pressure	/
Rear Tyre Pressure	/

Steering System	
Type	Flow amplification steering system
Steering Angle Each Direction	37°
Min. Turning Radius	7130mm

Hydraulic System	
Working Pressure	/
Boom Lifting Time	/
Total Cycle Time	10.6s

Brake System	
Full hydraulic braking system	

Service Refill Capacity	
Fuel Tank	320L
Hydraulic Tank	210L



LOVOL CONSTRUCTION MACHINERY GROUP CO., LTD.

Address: No. 75, Huanghe East Road, Huangdao District, Qingdao City, Shandong Province, China.

Website: en.lovol.com

Alibaba: lovolconstruction.en.alibaba.com

Facebook: [Cons Lovol](https://www.facebook.com/ConsLovel)

E-mail: lovol_overseas@global.lovol.com

TEL: +86-532-86907190

As manufacturer, LOVOL has right to constantly upgrade and improve our products without informing to customers. The pictures in literatures are for reference only, the detailed specifications are subject to real products.

Engine Model
Rated Power
Operating Weight
Bucket Capacity
Max. Breakout Force

CUMMINS QSL9.3
168KW
17970KG
3.3M³
175KN

FL958K

WHEEL LOADER